

TRICORE MOTOR

SINCE 1985



NO. 8 JINGKE 2ND RD., NANTUN DIST.,
TAICHUNG CITY 408, TAIWAN (R.O.C)

TEL: +886-4-23505088


FAX: +886-4-23505087

EMAIL: CONTACT@TRICORE.COM.TW

BRUSHLESS MOTOR

Brushless


Ø33mm | Outter

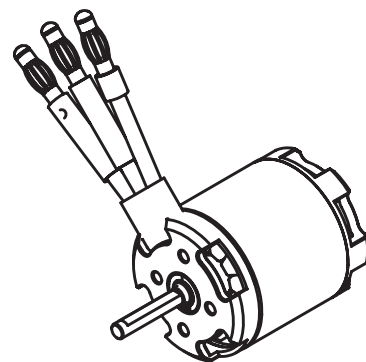

OMA3340011


Standar Operating Conditions

Nominal Voltage	Operating Voltage Range	Direction of Rotation	No-load Current	No-load Speed	Stall Torque	Stall Current	Max. Output Power	Motor Weight
v	v		A	rpm	mNm	A	w	g
22.2	11.1~22.2	CW&CCW	2.6	41700	1160	204	4529	116

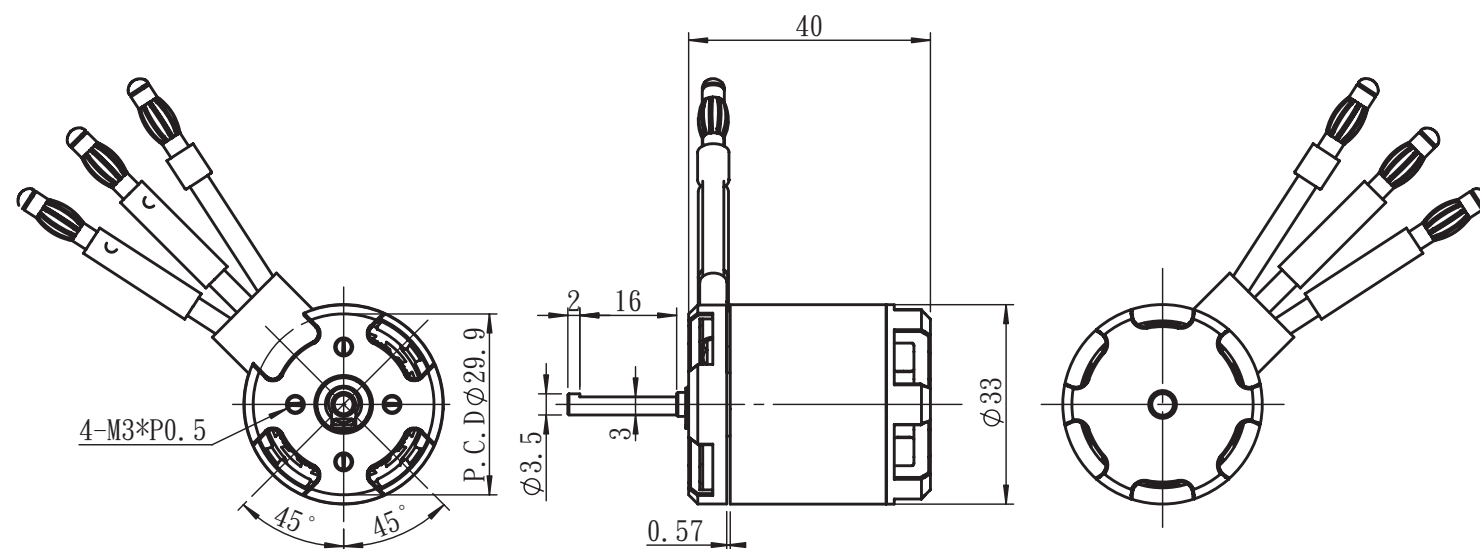

Brushless


Ø40mm | Outter

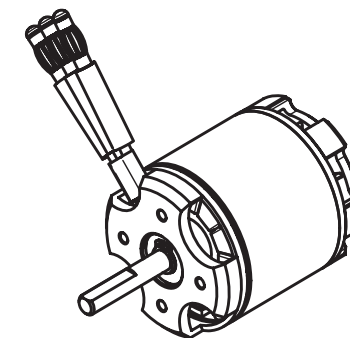

OMA4050013

Standar Operating Conditions


Nominal Voltage	Operating Voltage Range	Direction of Rotation	No-load Current	No-load Speed	Stall Torque	Stall Current	Max. Output Power	Motor Weight
v	v		A	rpm	mNm	A	w	g
22.2	11.1~22.2	CW&CCW	2.6	28500	3430	427	9479	215

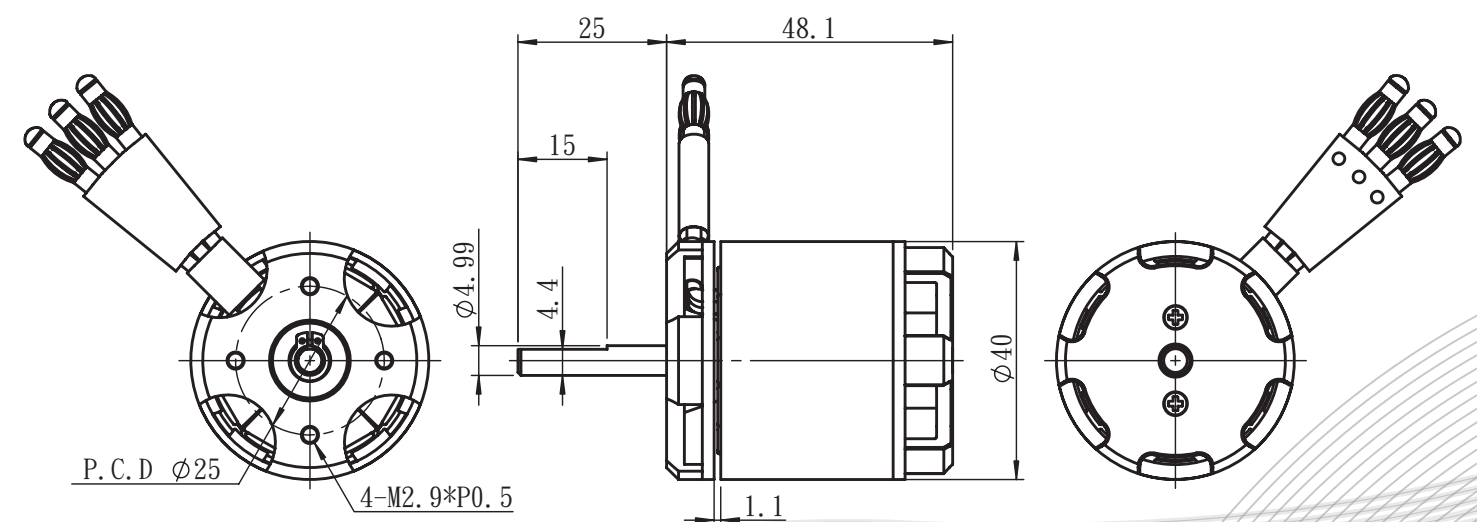

BRUSHLESS MOTOR

Brushless


Φ22mm | Inner

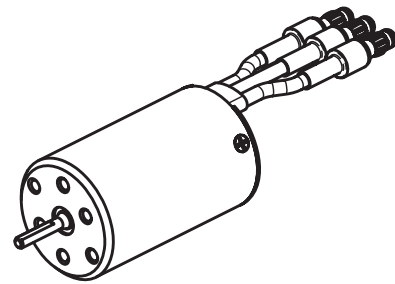

INA2236006


Standar Operating Conditions

Nominal Voltage	Operating Voltage Range	Direction of Rotation	No-load Current	No-load Speed	Stall Torque	Stall Current	Max. Output Power	Motor Weight
v	v		A	rpm	mNm	A	w	g
11.1	7.4~12.6	CCW&CW	0.6	44760	189.9	77.39	222	53

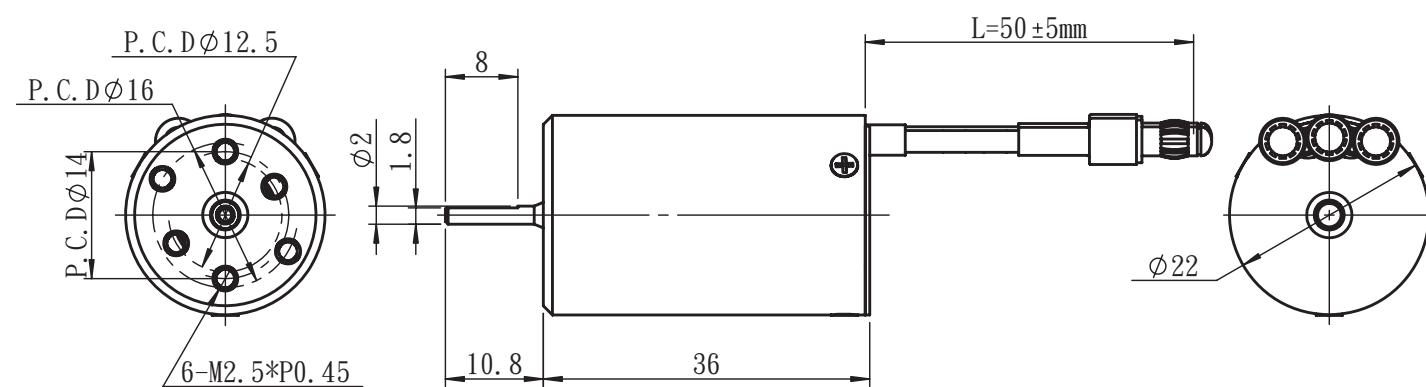

Brushless

Φ36mm | Inner

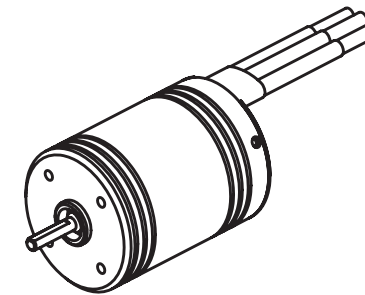

INA3650002

Standar Operating Conditions

Nominal Voltage	Operating Voltage Range	Direction of Rotation	No-load Current	No-load Speed	Stall Torque	Stall Current	Max. Output Power	Motor Weight
v	v		A	rpm	mNm	A	w	g
7.4	7.4~12.6	CW&CCW	2.0	25440	492	180.39	327	220

